

VARIMAT V2: Fast and dependable.

Using the new VARIMAT V2, polymer roofing membranes can be welded more rapidly resulting in lower cost. Users appreciate its streamlined ergonomics and its ease of use. The clearly laid out operating unit's "e-Drive" allows for the control of all relevant weld parameters.



Highly reliable in application even at undervoltage.

Hot-air welder

VARIMAT V2



- Process reliability: Machine cuts out if undervoltage is too high
- Patented spherical roller compensates unevenness
- Guide bar for ergonomic handling
- Maintenance free blower means lower service costs
- User-friendly display with "e-Drive" (press and turn control) to recall preset and saved welding settings
- Constant drive with regulated electronics

Technical data


Voltage	V~	230 / 400
Power	W	3680 / 5700
Temperature	°C	100 – 600
Speed	m/min	0.7 – 12
Air flow range	%	50 – 100
Width of welding nozzle	mm	40
Size (L x W x H)	mm	640 x 430 x 330
Weight	kg	35
Conformity mark		CE
Protection class I		⊕

Article No.:

- 138.108 VARIMAT V2, 230 V / 3680 W, Euro plug, storage case
- 137.821 VARIMAT V2, 400 V / 5700 W, 16 A CEE-plug, storage case
- 141.572 VARIMAT V2, 230 V / 3680 W, with 80 mm nozzle for bitumen, Euro plug, device case
- 153.428 VARIMAT S, 230 V / 4600 W, Euro-plug
- 153.427 VARIMAT S, 400 V / 5700 W, CEE-plug

Accessories VARIMAT V2

1		Ergonomic Height and angle of guide-bar can be adjusted easily
2		Maintenance-free High performance and brushless blower motor, no brushes to change
3		Intuitive Protected design. Easy-to-view display with "e-drive" and easy-to-store welding settings
4		Weld seam control The green air dam belt keeps the hot air in the welded seam. High speed New welding nozzle with protected design for reliable welding quality
5		More stability The patented pressure roller smoothes out any unevenness

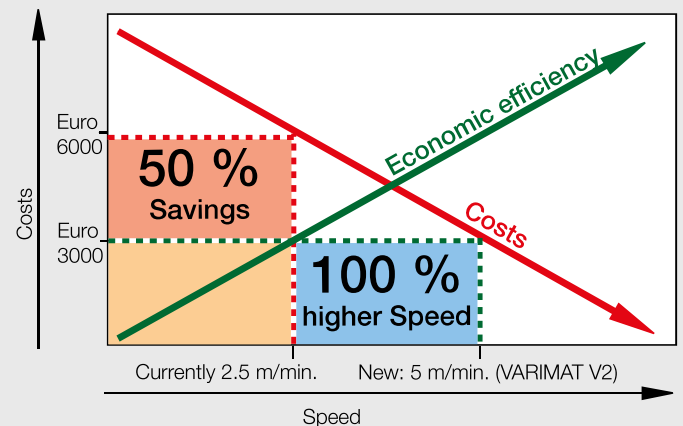



Welded with standard nozzle.



Welded with grip nozzle 25% higher weld seam strength. Mainly for TPO sealing sheets.

	113.995	Grip-nozzle 30 mm for TPO / FPO single plies
	113.600	Grip-nozzle 40 mm for TPO / FPO single plies
	110.805	20 mm overlap welding nozzle for thermoplastic sealing sheeting
	107.067	Additional weight for even more pressure
	139.048	Sturdy storage case 720 x 470 x 450 mm plywood, green included with purchase
	107.649	Replacement rolls
	132.429	2 welding plates for optimum welding start included with purchase
	138.817	Steel brush to clean nozzle included with purchase
	146.514	Solar profile kit for Renolit
	143.162	Gentle pressure roller for difficult ground conditions
	119.111	Chuck cone for replacing silicone pressure roller
	151.530	Mirror welding kit, nozzle right, for special welding applications
	107.612	Heating elements 230 V / 4400 W
	107.613	400 V / 5500 W

	143.179	Complete set with rake nozzle, 40 mm, and pressure roller, soft 40 mm Rake nozzle to solve the problems caused by bubbles forming on hard surfaces.
	116.323	Rake nozzle, 40 mm
	143.163	Pressure roller, soft, 40 mm (silicone only)
	108.923	Welding unit bitumen-kit 80 mm, 230 V
	108.924	Welding unit bitumen-kit 100 mm, 230 V
	108.925	Welding unit bitumen-kit 120 mm, 230 V
	108.927	Welding unit bitumen-kit 100 mm, 400 V / 6100 W
	108.928	Welding unit bitumen-kit 120 mm, 400 V / 6100 W
	115.892	Welding unit bitumen-kit 80 mm, 400 V / 6100 W
	159.408	Nozzle positioning gauge VARIMAT V2